



Vero i1 Pre-Installation Checklist

- COUNTERTOP PLACEMENT** The Veroi1 needs a well-ventilated space where the unit fits with a minimum of 2 additional inches surrounding it. The system can not be incased in order to ensure proper ventilation. The total required space with ventillation is **20.5 inches high, 17 inches wide, and 24 inches deep.**
- UNDERCOUNTER SPACE** The Inspire 2 requies an undercounter space to fit the unit's external filtration kit and Co2 tank with the ability to connect to the unit placed on the countertop. This filtration kit requires an undercounter space measuring **18 inches high, 24 inches wide and 5.3 inches deep.** in addition to space for the Co2 tank.
- POWER** An outlet must be **within 6 feet** from where the system will be placed with no extension cords and with the ability to run up to 10 Amps and 60 Hz. The system runs at 115 V, 60 Hz, and 2 Amps.
- WATER SUPPLY** A cold water source must be **within 8 feet** of the system with a min. pressure rating of 35 psi up to a max of 60 psi (2.75 - 6.9 bar). The Inspire 2 can be connected directly to a 3/8" compression shut off valve. A John Guest Angle Stop Valve can also be used when connecting to an existing sink.


Compression Shut Off Valve



Angle Stop Valve



- Co2** All Vero systems that operate with Sparkling water will require Co2. All clients are required to maintain the management of Co2 including the sourcing, swapping, and replacing of Co2 tanks. All Vero water units include the initial tank or in-Line Regulator. The most common size used for Vero is a 20lb Co2 tank. The estimated dimensions and sparkling water capacities of common CO2 tank sizes are listed below. The Co2 tank pressure is between 50-60 psi.

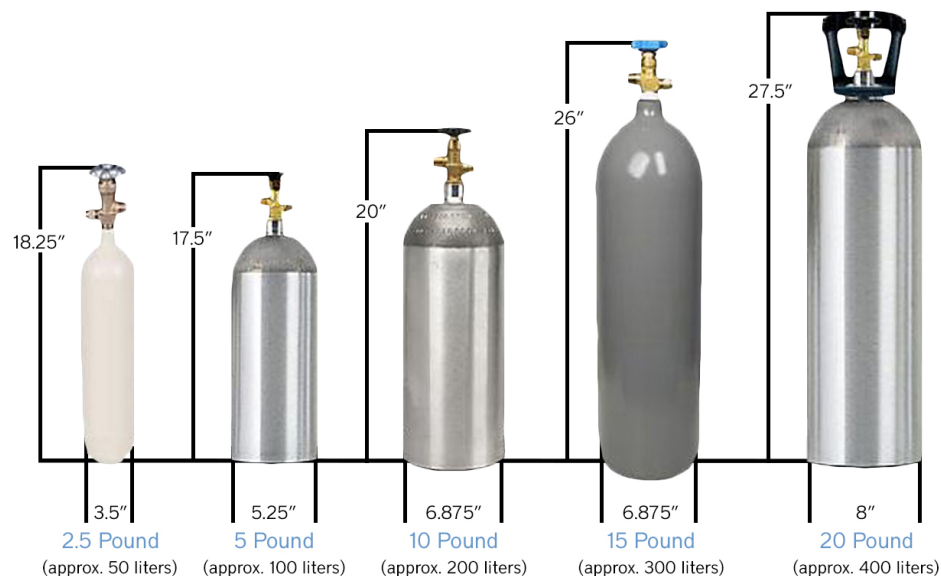

Some popular options to purchase CO2 tanks are [Airgas](#), [Praxair](#), and [Robinson's Oxygen](#). These services typically charge for the initial tank and then provide exchanges based on your preferred exchange method.